

CRB 100 FEEDER PILLAR

Manufactured for Quality

Constructed from 3mm steel plate hot dipped galvanised to BSEN ISO 1461.

Hinged Doors with IP55 seal for improved ingress protection

12mm external grade plywood fully treated backboard.

3mm Pillars fitted with cast stainless steel hinges



Anti- Vandal Features

Recessed Door

Fitted with Twin Tri-Head Locks

CRB Unique Features

Detachable Root


C&R Outdoor Lighting Ltd

www.crlighting.co.uk

Feeder Pillar Sizes

PILLAR CODE	HEIGHT	WIDTH	DEPTH	ROOT	OVERALL HEIGHT	WORKING DEPTH	BACKBOARD SIZE x mm	WEIGHT KG
CRB100	1250	800	325	300	1550	305	(H)1150 x (W)780	109

Door Aperture W 694mm x H 1050mm

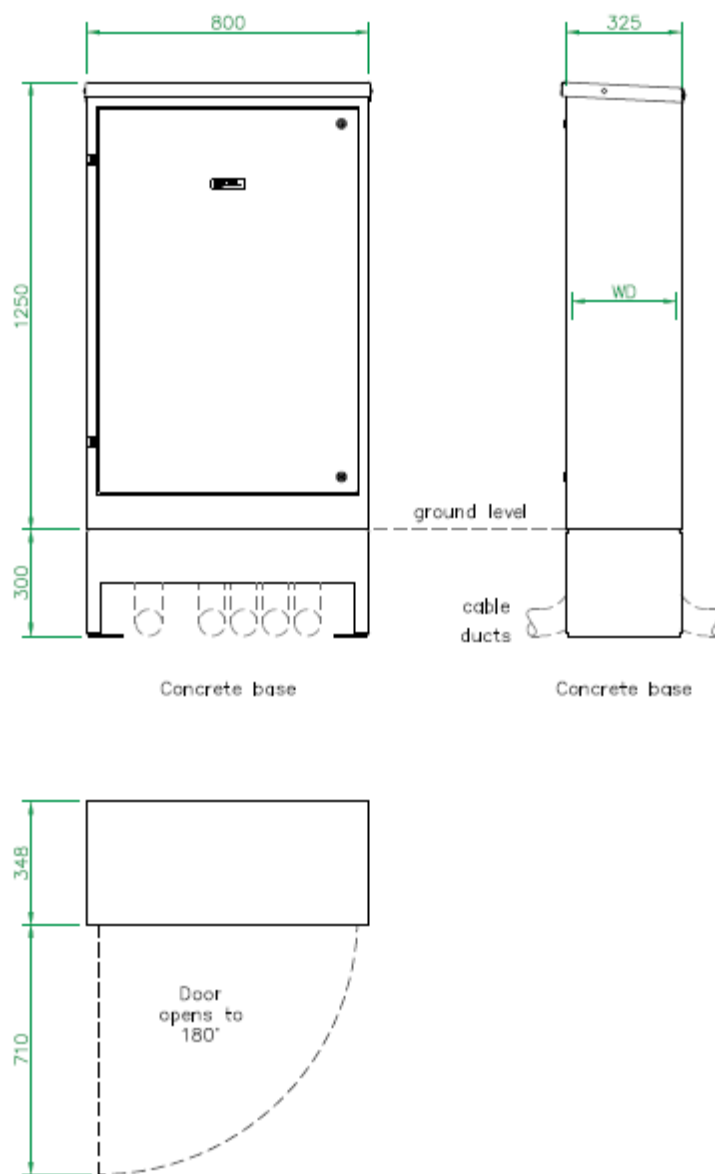

C&R Outdoor Lighting Ltd

www.crlighting.co.uk