


BLADE 2 100 WATT LED FLOOD LIGHT

Mechanical Diagrams

BLADE2 100W

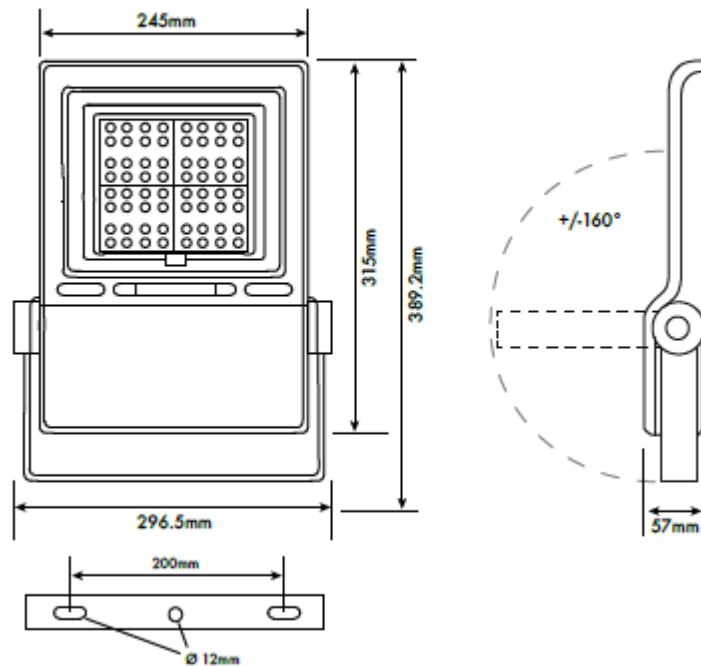

BLADE2 SPECIFICATION

Model Number	BLADE2-100
Fitting Colour	Black
Input Voltage	115-240V 50-60Hz
Output Load	100W
Power Factor	>0.95
Lumens	14000lm
Beam Angle	120°
Colour (K)	5000K
CRI	>80
Efficacy (lm/W)	140lm/W
Housing	Die cast Aluminium Case
Working Temperature	-30°C ~ +40°C
Protection	IP65
Weight	4Kg
Dimensions	315 x 245 x 57mm

C&R Outdoor Lighting Ltd

www.crlighting.co.uk

BLADE 2 100 WATT LED FLOOD LIGHT



Key Features:

- High luminous efficacy using 3030 LED chips
- Super slim rugged design (maximum depth 60mm)
- Custom designed case for effective heat dissipation
- In house LED driver technology
- Impact resistant tempered glass
- Bracket designed with $\pm 160^{\circ}$ angle with 5° interval locking system
- Designed to eliminate water ingress
- Optional Dusk to Dawn available
- IP65 rating
- 5 years warranty

C&R Outdoor Lighting Ltd

www.crlighting.co.uk